

ARE NOT USED. 3) IN OPTIONS WITH INDICATORS (EJ0086-11 THROUGH EJ0086-17), R83 AND R84 ARE ONLY SUPPLIED IN 48VDC (EJ0086-15) AND 260VDC (EJ0086-17) VARIANTS.

2

1

REV

1712

1225

ECN No

06/17/85

01/03/85

DATE

WKB

WAH

APP

APPROVED

WKB

UNLESS OTHERWISE NOTED, DIMENSIONS

ARE IN INCHES AND TOLERANCES ARE:

06/17/85

DWG No

SCALE

NTS

NOTES:

FILENAME [EJ0086-XX.Rev3B.doc] - LAST PRINTED [1/6/2010 10:47:00 AM]

PART No

EJ0086-XX

EJ0086-##

Α


REV

3B

2

SHEET 1 OF

WIRE LIST ⁽³⁾		No.	CODE	FROM	ТО	No.	CODE	FROM	ТО	No.	CODE	FROM	ТО	No.	CODE	FROM	ТО
	-	360	RD	TB5(+)	R60-1	369	WH/OR	K2-3	TB3-9	376	BU	K3-7	SW3-2	363A ⁽²⁾	OR	R83-2	DS13-1
	<u></u>	361	BK	TB5(-)	R59-1	370	WH/BU	K3-1	TB3-10	JMP-1	GR	SW3-3	SW3-6	364	BK	DS13-2	DS14-2
	Ļ	365	GR	CHASSIS GROUND	SW3-3	371	WH/BU	K3-4	TB3-11	362	BU	K3-5	R84-1	366	BK	DS14-2	TB5(-)
		367	WH/OR	K2-1	TB3-7	372	WH/BU	K3-3	TB3-12	362A ⁽²⁾	BU	R84-2	DS14-1	373	RD	TB5(+)	K3-8
	>	368	WH/OR	K2-4	TB3-8	375	WH	K2-7	SW3-5	363	OR	K2-6	R83-1	374	RD	K3-8	K2-8

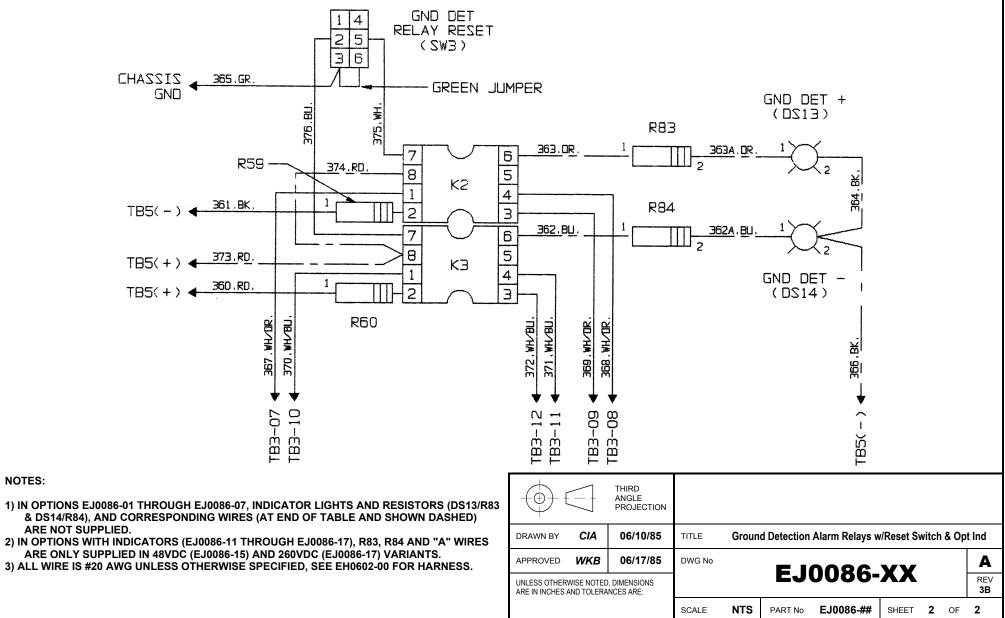

NOTES:

FILENAME [EJ0086-XX.Rev3B.doc] - LAST PRINTED [1/6/2010 10:47:00 AM]