


NOTES:

1) DS08 AND DS09 OPERATE FROM BATTERY CHARGER DC OUTPUT VOLTAGE.

2				 THIRD ANGLE PROJECTION	Ground Detection Indicator Lights				
1	21461	12/10/08	ND						
0A	10109	07/23/93	WAH	DRAWN BY	CIA	06/08/85	EJ0088-XX	A REV 1	
0	4620	01/05/88	WAH	APPROVED	WKB	06/17/85			
0	1699	06/17/85	WKB	UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:					
REV	ECN No	DATE	APP	SCALE	NTS	PART No	EJ0088-XX	SHEET	1 OF 2

WIRE LIST			
No.	CODE	FROM	TO
360	RD	TB5(+)	R51-2
361	BK	TB5(-)	R50-2
362	OR	R51-1	DS09-1
363	BR	R50-1	DS08-1
364	GR	DS08-2	DS09-2
365	GR	DS08-2	CHASSIS GROUND

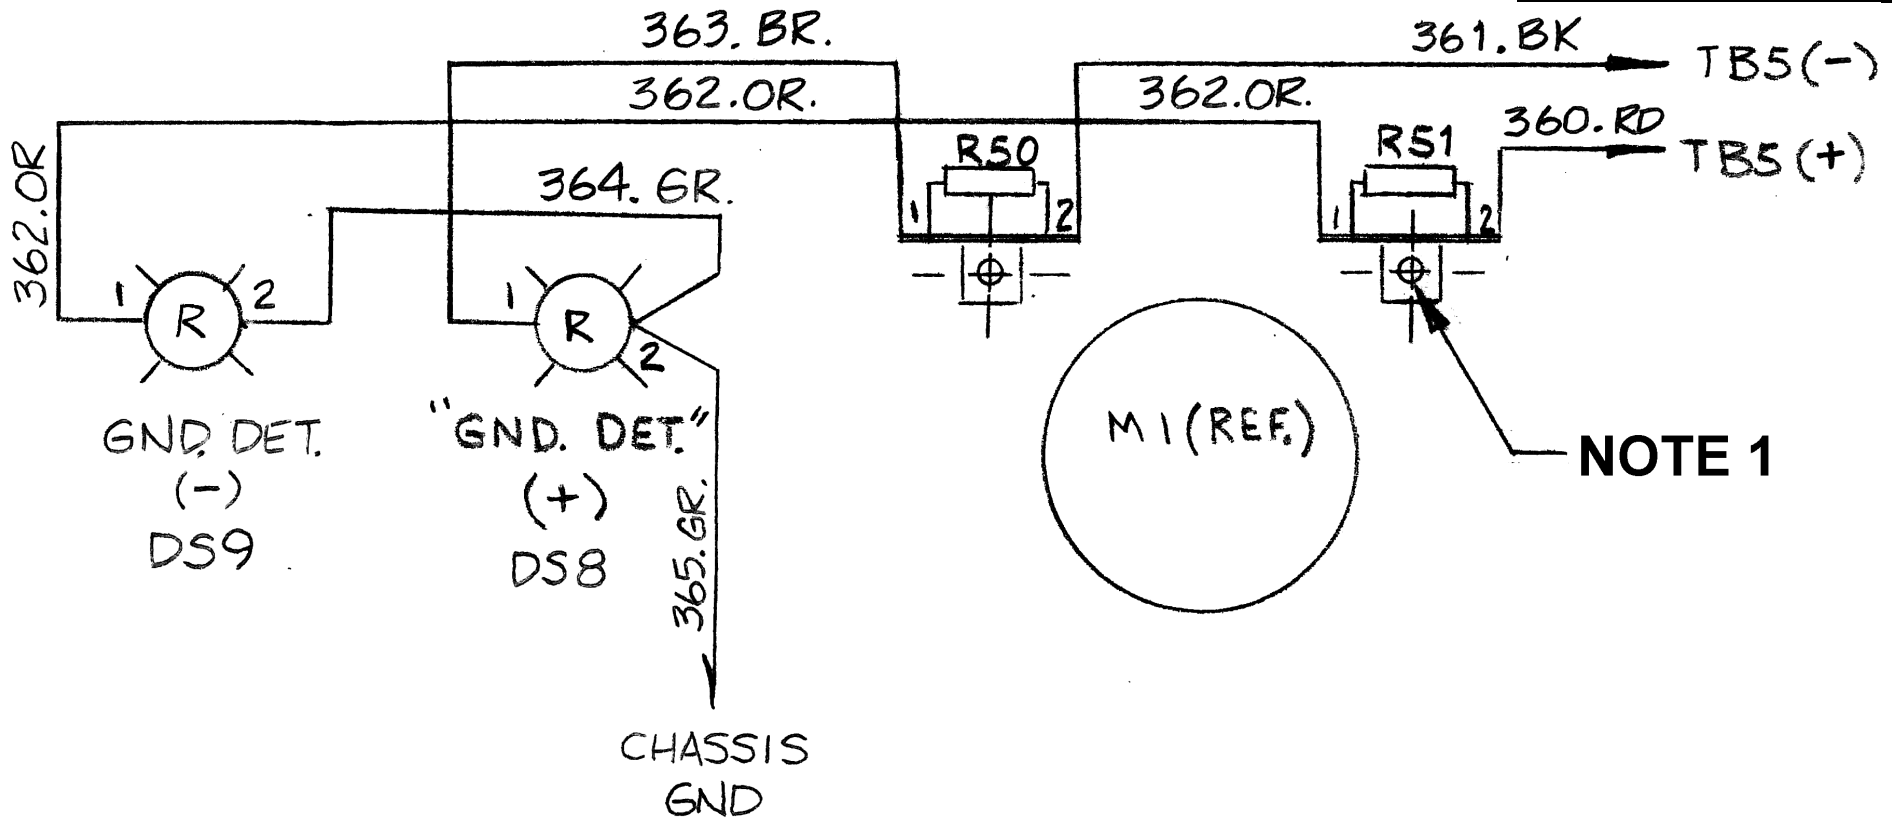

NOTE 1

NOTES:

- 1) USE DC AMMETER (M1) MOUNTING SCREWS TO MOUNT "PICKET FENCES" FOR R50 & R51.
- 2) ALL COMPONENTS SHOWN AS VIEWED FROM BACK OF INSTRUMENT PANEL.
- 3) ALL WIRE IS #20 AWG UNLESS OTHERWISE SPECIFIED.

		THIRD ANGLE PROJECTION	
DRAWN BY	CIA	06/08/85	TITLE
APPROVED	WKB	06/17/85	DWG No
UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:			EJ0088-XX A REV 1
SCALE	NTS	PART No	
		SHEET	2 OF 2